
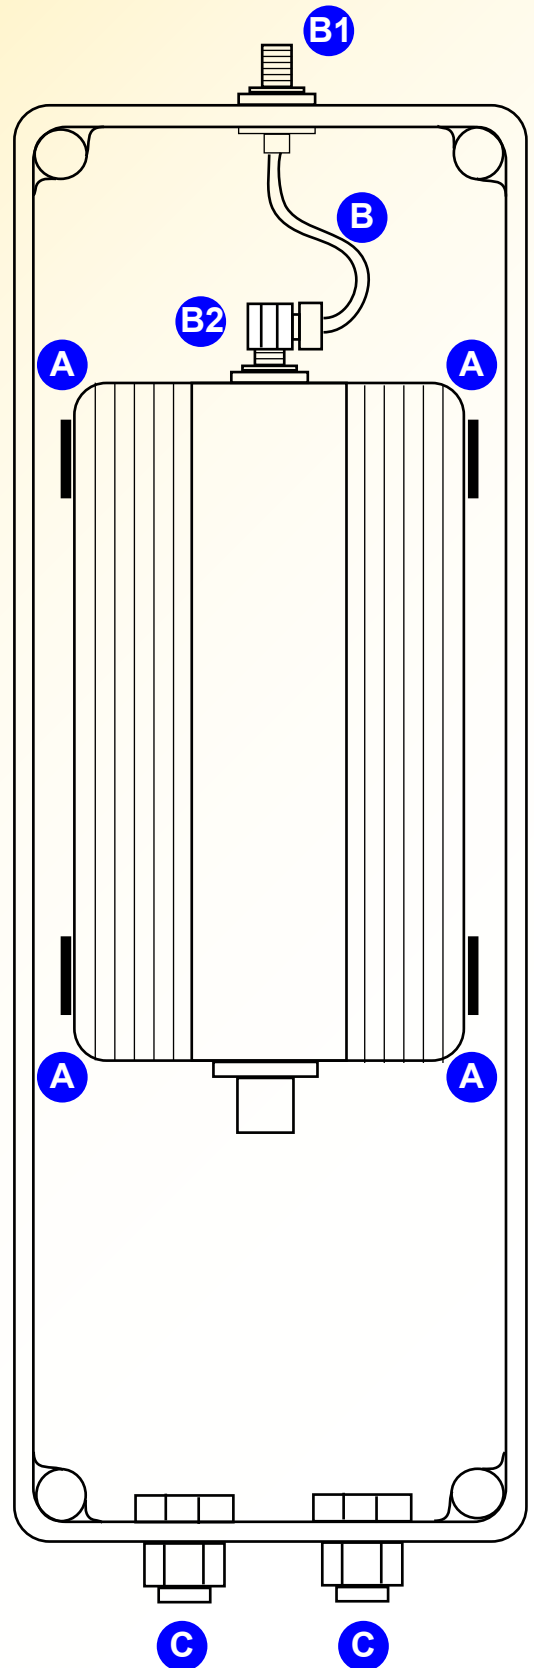


CCT/HSG - CCT/HSG/TEL IP65 Outdoor Housing

CCT/HSG: For use with CCT2440 and CCT1394

CCT/HSG/TEL: For use with T-Link

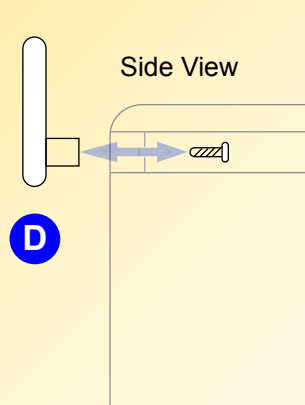

Assembly instructions

- 1: Mount supplied brackets (D) as shown.
- 2: Mount Tx/Rx unit in the plastic retaining clips (A).
- 3: Insert flexible link (B) and secure tightly.
- 4: Attached connector B2 of cable link to the Tx/Rx unit.
- 5: Attached Antenna to connector B1 of cable link.
- 6: Use cable Glands (C) for Video Data and Power cables.

- Notes:
- U Bolts supplied are for 50mm Pole radius
 - Always check correct polarity of power connector.
 - Ensure 12V is available, any voltage drops due to long cable runs should be addressed.
 - The cable glands, antenna coupling and any other holes must be protected with silicon gel. Failure to do so will allow water ingress that may damage the box and the equipment.
 - Remember, to obtain the best signal you should move the complete housing assembly up and down using a local monitor adjacent to the housing.
 - Observe Health & Safety regulations

Dim: 230 x 80 x 65 mm